

HIGH SPIN WASHER

THE MOST EFFICIENT FOR THE MOST DEMANDING CUSTOMERS

WED 11 ET
WED 14 ET
WED 18 ET

FEATURES

- High spin washer extractor. No need to be anchored to the floor.
- G Force 450.
- Body, drum and tub in stainless steel.
- Detergent dispenser with 4 compartments.
- 8 signals for automatic liquid dosing, programmable in time and delay.
- 3 water inlets.
- These machines have electronic control of imbalance with frequency inverter, that detects the unbalanced load before spinning. Standard frequency: 50 - 60 Hz.
- New microprocessor EASY TOUCH with touch screen. 26 preset programs.
- Possibility of programming, exporting and importing programs without limit, software updates, through USB port, using USB drive.
- Traceability standard: All washing process (temperatures, water levels) is stored in the washer and can be extracted to a PC by means of a USB drive.
- RS-485 serial communication port for monitoring / remote management.
- Wet Cleaning standard in the microprocessor: fully adjustable water levels and washing speed for delicate.
- Optimal loading standard to optimize water and chemicals consumptions.
- LOADING AID feature with water and rotation control for easy loading of the linen.
- Self-service version available by installing a central pay or coin meter on the standard model.
- CE, WRAS and GOST approved product. Optional version for ETL certified product.



OPTIONS

- Double drain kit, allow the recovery of the water, with important water savings. For models WED14 and WED18.
- Leveling feet.
- Drain pump kit for models WED11 and WED14.
- Bottom cover and plinth for loading height 850 mm from door bottom.
- Bottom cover and plinth for having same height in washers.
- Relay card with 6 extra dosing signals: total of 14 signals in the machine.
- Weighing System. Weighing sensor system on feet.
- Steam kit to transform an electric or hot water heated machine into steam version.
- Self-Service Kits: Coiner and box; Central pay; Delayed opening door option in case of power outage.
- Ship voltage for electric models: 440V III 50/60 Hz No neutral or 480V III 50/60 Hz No neutral.



Easy touch



Inox



Eau chaude et Eau froide



Inverter



3 arrivées d'eau



Charge optimale



Installation et maintenance aisées



Tambour efficace




Wet cleaning



Pesage

| TECHNICAL DATA | UNIT. | WED11 ET | WED14 ET | WED18 ET | | | | | | |
|--|---------------------|-------------------|--------------------------|-------------------|--------------------------|-------------------|--------------------------|-------------|--|--|
| DRUM | | | | | | | | | | |
| Load capacity 1:9 / 1:10 | Kg | 11/10 | 14/13 | 20/18 | | | | | | |
| Volume | l | 100 | 130 | 180 | | | | | | |
| Diameter | mm | 532 | 620 | 700 | | | | | | |
| Depth | mm | 425 | 430 | 470 | | | | | | |
| GENERAL DETAILS | | | | | | | | | | |
| Washing speed / Spining speed | r.p.m. | 50/ 1.245 | 50/ 1.150 | 47/ 1.080 | | | | | | |
| G Factor | - | 450 | 450 | 450 | | | | | | |
| Maximum force transmitted | KN | 2,3 ±0,2 | 2,5 ±1,05 | 3,6 ±1,4 | | | | | | |
| Frequency-dynamic force | Hz | 16,7 | 16,7 | 16 | | | | | | |
| Sound level | dB | 70 | 70 | 70 | | | | | | |
| Self-service version | - | Yes | Yes | Yes | | | | | | |
| Double drain | - | No | Opt | Opt | | | | | | |
| Weighing System / Tilting System | - | Opt/No | Opt/No | Opt/No | | | | | | |
| DOOR | | | | | | | | | | |
| Height center door / Height door | mm | 625/415 | 700/440 | 750/510 | | | | | | |
| Diameter | mm | 290 | 373 | 373 | | | | | | |
| POWER | | | | | | | | | | |
| Motor | kW | 0,75 | 1,5 | 2,2 | | | | | | |
| Heating (Electric model) | kW | 6 | 9 | 12 | | | | | | |
| Max. power (Electric model) | kW | 6,25 | 9,5 | 12,75 | | | | | | |
| Max. power (steam and hot water) | kW | 0,75 | 1,5 | 2,2 | | | | | | |
| CONNECTIONS | | | | | | | | | | |
| | | ELECTRICAL | STEAM / HOT WATER | ELECTRICAL | STEAM / HOT WATER | ELECTRICAL | STEAM / HOT WATER | | | |
| Tension 230V - I + N + T | N° x mm2 / A | 3 x 4 / 32A | 3 x 1,5 / 6A | 3 x 10 / 50A | 3 x 1,5 / 10A | 3 x 16 / 63A | 3 x 1,5 / 10A | | | |
| Tension 230V - III + T | N° x mm2 / A | 4 x 2,5 / 20A | - | 4 x 4 / 25A | - | 4 x 6 / 40A | - | | | |
| Tension 400V - III + N + T | N° x mm2 / A | 5 x 1,5 / 10A | - | 5 x 1,5 / 16A | - | 5 x 2,5 / 20A | - | | | |
| Steam inlet (Steam mod.) | inch | 1/2" | | 1/2" | | 1/2" | | | | |
| Maximum steam consumption (Steam mod.) | Kg/h | 7 | | 8,5 | | 12 | | | | |
| Water inlet | inch | 3/4" | | 3/4" | | 3/4" | | | | |
| Water main pressure | Kgs/cm ² | 2-4 | | 2-4 | | 2-4 | | | | |
| Maximum water consumption* | Lit/h | 71,4 | | 88,8 | | 118,3 | | | | |
| Drain | mm/inch | 3" | | 3" | | 3" | | | | |
| Drainage capacity | Lit/min | 200 | | 200 | | 200 | | | | |
| DIMENSIONS / PACKING DIMENSIONS | | | | | | | | | | |
| Width / Width | mm | 692/730 | | | 788/830 | | | 884/930 | | |
| Depth / Depth | mm | 788/1.000 | | | 869/1.010 | | | 913/1.030 | | |
| Height / Height | mm | 1.158/1.410 | | | 1.307/1.560 | | | 1.415/1.700 | | |
| Net weight / Gross weight | kg | 230/239 | | | 250/283 | | | 360/393 | | |
| Volume | m ³ | 1,03 | | | 1,31 | | | 1,63 | | |

* N°20 Program, 75% load

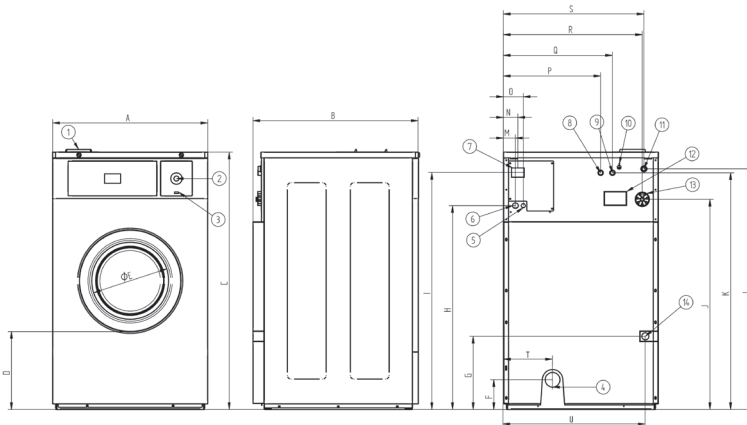

- 01. Soap dispenser
- 02. Emergency stop
- 03. Usb port
- 04. Drain
- 05. Electric connection to liquid soap pumps
- 06. Electrical connection
- 07. Main switch
- 08. Auxiliar water inlet
- 09. Hot water inlet
- 10. Ground connection
- 11. Cold water inlet
- 12. Blur output / water overload
- 13. Liquid soap connection
- 14. Steam connection

| | A | B | C | D | E | F | G | H | I | J | K | L | M | N | O | P | Q | R | S | T | U |
|-------|-----|-----|-------|-----|-----|-----|-----|-------|-------|-------|-------|-------|----|----|-----|-----|-----|-----|-----|-----|-----|
| WED11 | 692 | 788 | 1.158 | 408 | 290 | 93 | 355 | 886 | 1.055 | 940 | 1.053 | 1.073 | 61 | 74 | 101 | 413 | 468 | 610 | 623 | 252 | 626 |
| WED14 | 788 | 869 | 1.307 | 427 | 373 | 130 | 385 | 1.035 | 1.203 | 1.067 | 1.202 | 1.222 | 61 | 74 | 101 | 494 | 554 | 706 | 714 | 243 | 718 |
| WED18 | 884 | 913 | 1.415 | 490 | 373 | 99 | 390 | 1.143 | 1.207 | 1.166 | 1.331 | 1.331 | 61 | 74 | 101 | 437 | 517 | 769 | 810 | 355 | 833 |